


Assembly example

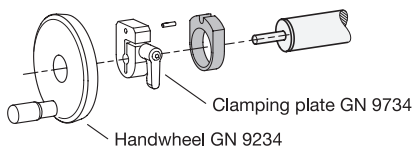

d ₁ Ø Linear actuator	b	h	Length l
18	24	33	10
30	35	42	10
40	47	56,5	10
50	58	61	10
60	64	-	7

Specification

- Aluminum
Black anodized **ELS**
- Grub screw DIN 913
Stainless steel AISI 304
- *Stainless Steel Characteristics* → Page QVX
- RoHS



Information

Torque supports GN 295.2 are required for attaching a position indicator or a clamping plate to configurable linear actuators.

The torque supports are made of black anodized aluminum and are non-positively clamped to the linear actuator. With the open radial groove on one side, they prevent the position indicator or clamping plate from twisting.

see also...

- *Linear Actuators GN 2910 / GN 2920 / GN 2930*
- *Position Indicators GN 9034 (Electronic Counter)* → Page QVX
- *Position Indicators GN 9534 (Mechanical Counter)* → Page QVX
- *Clamping Plates GN 9734* → Page QVX
- *Handwheels GN 9234* → Page QVX

How to order

GN 295.2-30-ELS

1 d₁

2 Finish

