


**4 Type**

- A** only with retaining ring
- H** with retaining cable
- K** with ball chain

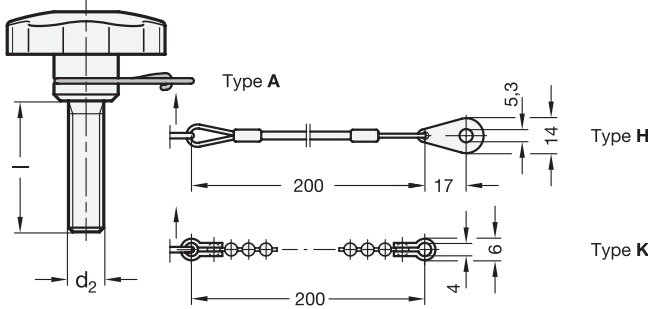

<b>1</b>	<b>2</b>	<b>3</b>					<b>d<sub>3</sub></b>	<b>h<sub>1</sub></b>	<b>h<sub>2</sub></b>	<b>h<sub>3</sub></b>	<b>r ≈</b>	<b>s</b>	<b>t</b>
40	M 8	20	30	40	-	14	24	12	3,2	22,3	2,8	15	
50	M 10	20	30	40	-	18	30	17	3,9	29,6	3,2	18	
60	M 12	20	30	40	50	20	38	20	3,9	30,7	3,2	22	

**Specification**

- Knob  
Stainless Steel AISI 316 L (A4)
- Hub welded
- matte, shot blasted
- Threaded stud / Bushing  
Stainless Steel AISI 304
- Retaining ring GN 111.6  
Stainless Steel AISI 301
- Ball chain GN 111.5 (Type K)  
Stainless Steel AISI 301
- Retaining cable GN 111.2 (Type H)  
Stainless Steel  
coated with clear plastic
- *Stainless Steel characteristics* → Page 1489
- **RoHS**

**On request**

- Ball chains / Retaining cables  
with other lengths
- with spiral retaining cable GN 111.4
- other GN / DIN standards  
with loss protection

**Information**

Stainless Steel-Star knobs GN 5334.13 can be captive-attached to a base element with the help of a ball chain or a retaining cable.

The star knobs are supplied ready assembled (with retaining ring and ball chain or retaining cable).

**see also...**

- *Stainless Steel-Ball chains GN 111.5* → Page 876
- *Stainless Steel-Retaining cables GN 111.2* → Page 877
- *Spiral retaining cables GN 111.4* → Page 878
- *Stainless Steel-Retaining rings GN 111.6* → Page 879
- *Further star knobs with loss protection GN 111.7* → Page 1426

<b>How to order (Bushing)</b>		<b>1</b>	<b>d<sub>1</sub></b>
		<b>2</b>	<b>d<sub>2</sub></b>
<b>GN 5334.13-40-M8-H</b>		<b>4</b>	<b>Type</b>

<b>How to order (Threaded stud)</b>		<b>1</b>	<b>d<sub>1</sub></b>
		<b>2</b>	<b>d<sub>2</sub></b>
		<b>3</b>	<b>Length l</b>
<b>GN 5334.13-60-M12-40-A</b>		<b>4</b>	<b>Type</b>

1.1  
1.2  
1.3  
1.4  
2.1  
2.2  
2.3  
2.4