



Application examples

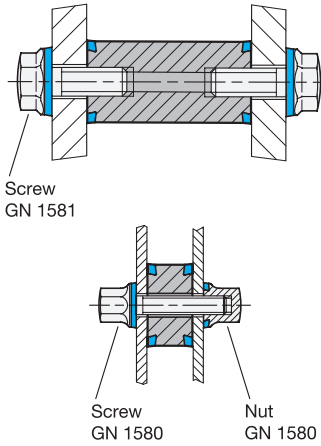

- 3** Type
- A1** Through-hole
- A2** Through-hole with continuous thread
- A3** Through-hole with thread on both sides

d <sub>1</sub>	Length l ±0,1				Length l ±0,2			d <sub>2</sub> Through-hole for screw	d <sub>3</sub> Thread	d <sub>4</sub>	d <sub>5</sub>	t min.
	Type A1	Type A2	Type A3									
22	10	12	16	20	30	50	M 5	M 6	18	22,8	12	
28	12	16	20	30	50	75	M 6	M 8	24	28,8	16	
34	12	16	20	30	50	100	M 8	M 10	30	34,8	20	

Specification

- Stainless steel AISI 316L  
Matte finish (Ra < 0.8 µm) **MT**
- Sealing ring **H**
  - H-NBR  
Temperature resistant -25 °C to +150 °C
  - EPDM **E**  
Temperature resistant -40 °C to +120 °C
  - Blue
  - Hardness 85 ±5 Shore A
  - FDA compliant
- [Elastomer Characteristics](#) → Page QVX
- [Stainless Steel Characteristics](#) → Page QVX
- RoHS

Accessory

- [Sealing Rings GN 7600](#) → Page QVX

Information

Stainless steel spacers GN 6226 are certified according to DGUV Test guidelines and are intended for use in hygiene areas. The sealed mounting surfaces enable fastening without dead spaces. The high quality finish prevents adherence of dirt and facilitates cleaning.

Spacers are used to fasten parts at an offset parallel to their plane of installation. This avoids doubling up on surfaces and leaves space for cleaning. The internal thread can alternatively be used as a through hole by a screw with a smaller thread.

see also...

- [Product Family Hygienic Design](#) → Page QVX
- [Stainless Steel Screws Hygienic Design GN 1580](#) → Page QVX
- [Stainless Steel Nuts Hygienic Design GN 1580](#) → Page QVX
- [Stainless Steel Screws Hygienic Design GN 1581 \(Low-Profile Head\)](#) → Page QVX
- [Stainless Steel Screws Hygienic Design GN 1582 \(with Recessed Stud for Loss Protection\)](#) → Page QVX

How to order

1	d <sub>1</sub>
2	Length l
3	Type
4	Finish
5	Material (sealing ring)

**GN6226-28-75-A3-MT-H**

3.1  
3.2  
3.3  
3.4  
3.5  
3.6  
3.7  
3.8  
3.9