


Assembly examples

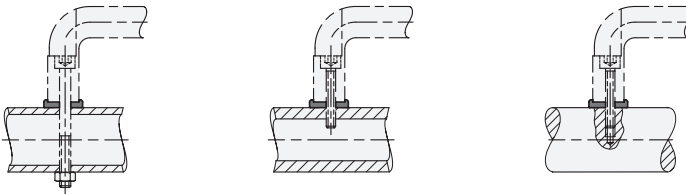

| d ₁ | Nominal dimension | | a | b | d ₂ | h ₁ | h ₂ | h ₃ | l ₁ | l ₂ | s | for cabinet U-handles |
|----------------|-------------------|------|----|----|----------------|----------------|----------------|----------------|----------------|----------------|-----|-----------------------|
| | min. | max. | | | | | | | | | | |
| 30 | 28,6 | 32 | 14 | 23 | 5 | 1,5 | 11 | 45 | 5,5 | 1,5 | 1,5 | GN 725.1-86 |
| 30 | 28,6 | 32 | 16 | 25 | 6 | 1,5 | 13 | 51 | 6,5 | 1,5 | 1,5 | GN 725.1-117 |

Specification

- Polyamide (PA)
 - Glass fiber reinforced
 - Temperature resistant up to 130 °C
 - Black, matte finish
- *Plastic Characteristics* → Page 2158
- RoHS

Information

Adapters GN 725.2 allow you to install GN 725.1 cabinet U-handles on pipes / rods with diameters ranging from 28.6 mm to 32 mm.

How to order

GN 725.2-30-14-23

| | |
|---|----------------|
| 1 | d ₁ |
| 2 | a |
| 3 | b |

1.1
1.2
1.3
1.4
2.1
2.2
2.3
2.4

