

elesa
Original design MPR.



l_1	d	h_1	h_2	h_3	h_4	h_5	l_2	l_3	l_4	l_5	$m_1 \pm 0,1$	$m_2 \pm 0,1$	m_3	m_4	s
90	4,2	29	16,5	47	77	16	141	96	135	65	118	79	16	3	3
105	5,2	43	17	60	95	18	167	116	158	86	141	98	15	4,5	3

Specification



- Plastic
Polyamide PA
- Glass fiber reinforced
- Temperature resistant up to 100 °C
- Colors (matte finish):
Black, RAL 9005 **SW**
Gray, RAL 7040 **GR**
White, RAL 9002 **WS**
- Pin
Stainless steel AISI 303
- Return spring
Stainless steel AISI 302
- *Strength Properties* → Page 2116
- *Plastic Characteristics* → Page 2158
- *Stainless Steel Characteristics* → Page 2166
- RoHS

Information

The folding handles with recessed tray GN 825.2 are used if the handle is to protrude by a maximum of 3 mm when folded down.

After releasing the handle, it returns to its starting position by spring-loaded return.

see also...

- *Folding Handles with Recessed Tray GN 425.8 (with Handle Locking or Spring-Loaded Return)* → Page 176
- *Folding Handles GN 825.1 (Plastic, with Spring-Loaded Return)* → Page 175

How to order


GN 825.2-90-SW

1 l_1

2 Color



Installation dimensions

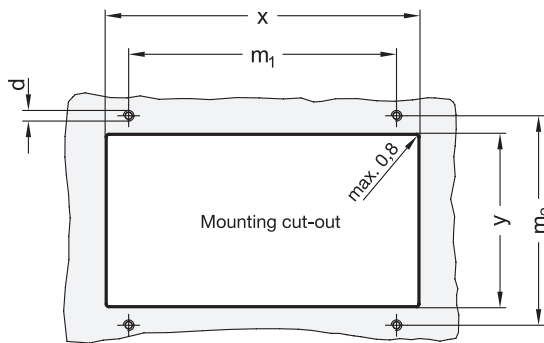

for $l_1 = 90$					for $l_1 = 105$				
d	$x +0,2$	$y +0,2$	$m_1 \pm 0,1$	$m_2 \pm 0,1$	d	$x -0,2$	$y -0,2$	$m_1 \pm 0,1$	$m_2 \pm 0,1$
M 4	135	65	118	79	M 5	158	86	141	98

1.1
1.2
1.3
1.4
2.1
2.2
2.3
2.4

