


**2 Type**

- A** For mechanical position indicators or without position indicator
- B** For electronic position indicators

**Assembly examples**

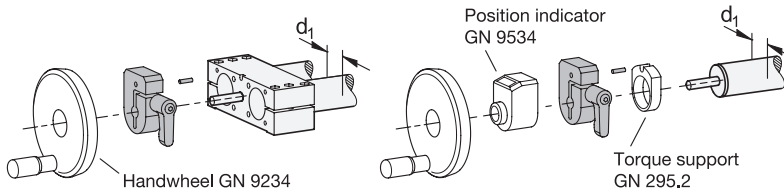

d <sub>1</sub> Ø Linear actuator	b	d <sub>2</sub> F9	l <sub>1</sub>		l <sub>2</sub>		l <sub>3</sub>	Compatible with position indicator	
			Type A	Type B	Type A	Type B		Type A	Type B
30	33	8	47	55	30,5	30,5	24,5	GN 9534	GN 9034
40	48	12	66,5	73	43	40,5	24,5	GN 9534	GN 9034
50	48	12	66,5	73	43	40,5	24,5	GN 9534	GN 9034
60	48	14	66,5	73	43	40,5	24,5	GN 9534	GN 9034

**Specification**

- Zinc die casting  
Powder coated  
Black, textured finish
- Spiral pin ISO 8750  
Stainless steel
- Adjustable hand lever GN 302.1
  - Zinc die casting
  - Powder coated
  - Black, RAL 9005, textured finish
  - Threaded insert
  - Stainless steel AISI 303

→ Page QVX

- ISO Fundamental Tolerances → Page QVX
- Stainless Steel Characteristics → Page QVX
- RoHS

**Information**

Clamping plates GN 9734 are used to fix the spindles of configurable linear actuators in place after adjustment.

Using a hand lever, the bore diameter of the clamping plate is reduced until the spindle stem of the linear actuator is clamped, preventing unintentional adjustment of the approached position.

The enclosed spiral pin connects the clamping plate to the torque support, preventing it from twisting. If no position indicator is mounted to the linear actuator, as shown in the example, type A is recommended.

see also...

- Handwheels GN 9234 → Page QVX
- Torque Supports GN 295.2 / GN 296.2 → Page QVX / QVX
- Position Indicators GN 9034 (Electronic Counter) → Page QVX
- Position Indicators GN 9534 (Mechanical Counter) → Page QVX

**How to order**

**GN9734-40-A**

- 1 d<sub>1</sub>
- 2 Type

