

EFFBE Levelmount® KE-Series

Wedge mounts for machines with or without mounting option and requiring a particularly rigid installation.



Construction

- Lateral set screw with fine thread
- Anti-slip or damping coating (optional)



Sizes

Article description	A in mm	B in mm	H ₀ in mm	Ni in mm	Load (max.) with coating kN	Load (max.) without coating kN
KE 5	105	55	36	-4 / +3	9,0	15,0
KE 10	115	115	40	-4 / +4	28,0	50,0
KE 20	150	150	47	-5 / +4	36,0	40,0
KE 40	200	200	46	-4 / +4	100,0	200,0
KE 60	220	250	74	-9 / +11	90,0	100,0
KE 70	300	400	74	-11/ +8	135,0	150,0

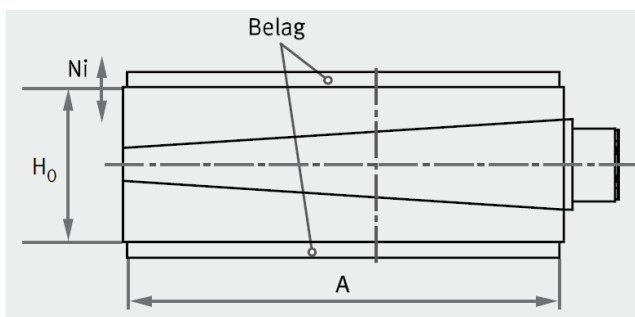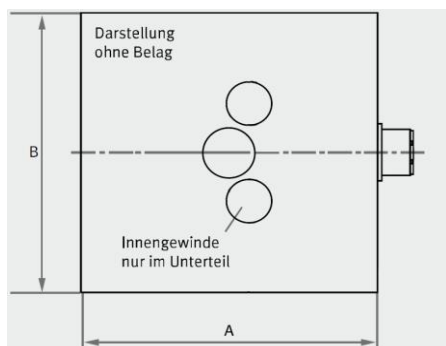

Properties

- Anchor-free installation
- Positioning / level fixing with damping coating for active / passive isolation
- Load range max. 15-150 kN
- Natural frequency (stat.) > 15 Hz according to damping coating
- Levelling range max. 7-20 mm

Materials

- Element bodies made of cast iron, Metal surface painted yellow
- Coating made of elastomer with high elasticity, oil-resistant, non-ageing
- Levelling screw grade 8.8, galvanised